




# Air Handling Units

Daikin air handling units, with their plug-and-play design and inherent flexibility, can be configured and combined specifically to meet the exact requirements of any building, no matter what it is used for or who is to work there. Our systems are designed to be the most environmentally friendly and the most energy efficient in the market, thus reducing their ecological impact, while, at the same time, keeping costs down through the minimisation of energy consumption.


When combined with the small physical footprint of the system, these features make our air handling units ideal for all markets.

# Double Deck FAHU with Heat Wheel - Chilled Water

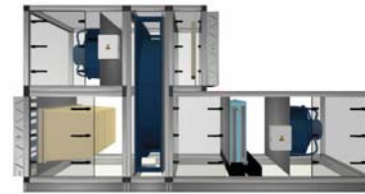


Unit Tag	Model	Supply Air Flow		Return Air Flow		Heat Recovery Wheel						Coil						Fan & Motor Supply			Fan & Motor Return			Dimension						
						Fresh Air On Heat Wheel		Fresh Air on Heat Wheel		Fresh Air off Heat Wheel		Air On Coil		Air Off Coil	Total Capacity	Sensible Capacity	Chilled Water Temperature		Water Flow	WPD	Fan Type	ESP	Power Input	Fan Type	ESP	Power Input	Length	Width	Height	Weight
		CFM	L/S	CFM	L/S	DB °C	WB °C	DB °C	WB °C	DB °C	WB °C	DB °C	WB °C	DB °C	WB °C	DB °C	KW	KW	In °C	Out °C	l/s	KPA		Pa	Kw		Pa	Kw	mm	mm
FAHU-1	840 X 1110	2119	1000	1907	900	35	27	25	19.5	28.5	22.7	28.5	22.7	14.0	33.5	17.8	7	12	1.6	38	EC	500	1.81	EC	500	1.17	3270	1260	1720	709
FAHU-2	850 X 1510	3178	1500	2860	1350	35	27	25	19.5	27.3	21.5	27.3	21.5	14.0	42.2	24.5	7	12	2.01	26	EC	500	2.71	EC	500	1.89	3400	1660	1750	913
FAHU-3	920 X 1720	4237	2000	3813	1800	35	27	25	19.5	27.3	21.5	27.3	21.5	14.0	56.2	32.6	7	12	2.68	46	EC	500	3.46	EC	500	2.28	3600	1870	1880	1108
FAHU-4	980 X 1900	5297	2500	4767	2250	35	27	25	19.5	27.3	21.5	27.3	21.5	14.0	70.2	40.7	7	12	3.34	48	EC	500	4.38	EC	500	2.70	3850	2050	2000	1286
FAHU-5	1100 X 1920	6356	3000	5720	2700	35	27	25	19.5	27.7	22.0	27.7	22.0	14.0	88.8	50.6	7	12	4.23	25	EC	500	5.92	EC	500	3.46	4220	2070	2240	1522
FAHU-6	1170 X 2050	7415	3500	6674	3150	35	27	25	19.5	27.8	22.0	27.8	22.0	14.0	107.6	59.2	7	12	5.13	28	EC	500	6.51	EC	500	3.86	4420	2205	2380	1745
FAHU-7	1230 X 2160	8474	4000	7627	3600	35	27	25	19.5	27.8	22.0	27.8	22.0	14.0	123.0	67.7	7	12	5.86	33	EC	500	7.66	EC	500	4.90	4730	2315	2500	1992
FAHU-8	1350 X 2150	9534	4500	8580	4050	35	27	25	19.5	28.2	22.5	28.2	22.5	14.0	145.5	78.6	7	12	6.93	37	EC	500	8.51	EC	500	5.22	4870	2305	2740	2129
FAHU-9	1410 X 2250	10593	5000	9534	4500	35	27	25	19.5	28.2	22.5	28.2	22.5	14.0	161.7	87.3	7	12	7.70	41	EC	500	8.94	EC	500	5.81	5000	2405	2860	2288
FAHU-10	1540 X 2390	12712	6000	11440	5400	35	27	25	19.5	27.9	22.2	27.9	22.2	14.0	186.9	102.8	7	12	8.9	43	EC	500	3 x 3.49	EC	500	7.31	4380	2560	3060	2309
FAHU-11	1660 X 2510	14830	7000	13347	6300	35	27	25	19.5	28.3	22.5	28.3	22.5	14.0	229.1	123.7	7	12	10.92	38	EC	500	3 x 4.06	EC	500	8.71	4380	2680	3300	2553
FAHU-12	1780 X 2620	16949	8000	15254	7200	35	27	25	19.5	28.4	22.5	28.4	22.5	14.0	265.1	140.5	7	12	12.63	40	EC	500	3 x 4.56	EC	500	9.60	4580	2810	3540	2762
FAHU-13	1850 X 2810	19067	9000	17161	8100	35	27	25	19.5	28.4	22.6	28.4	22.6	14.0	298.2	158.0	7	12	14.21	50	EC	500	4 x 3.90	EC	500	3 x 3.46	3830	3000	3680	2770
FAHU-14	1970 X 2880	21186	10000	17161	8100	35	27	25	19.5	28.8	22.8	28.8	22.8	14.0	339.5	183.3	7	12	16.18	42	EC	500	4 x 4.49	EC	500	3 x 3.42	3980	3070	3740	3085

# FAHU without Recovery - Chilled Water

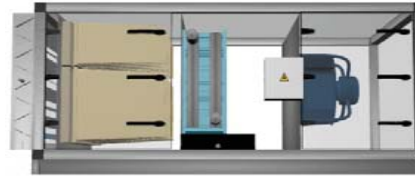


Unit Tag	Model	Supply Air Flow		Coil							Fan & Motor Supply					Dimension			Weight Kg
				Air On Coil		Air Off Coil	Total Capacity	Sensible Capacity	Chilled Water Temperature		Water Flow	WPD	Fan Type	ESP	Input	Power Length	Width	Height	
		CFM	L/S	DB °C	WB °C	DB °C	KW	KW	In °C	Out °C	l/s	KPA		Pa	Kw	mm	mm	mm	
FAHU-1	660 X 900	1059	500	35.0	27.0	14.0	27.8	13.0	7	12	1.32	33	EC	350	0.75	1970	1050	760	224
FAHU-2	780 X 970	1589	750	35.0	27.0	14.0	41.6	19.6	7	12	1.98	31	EC	350	0.98	2140	1120	880	274
FAHU-3	840 X 1120	2119	1000	35.0	27.0	14.0	55.5	26.1	7	12	2.64	29	EC	350	1.29	2100	1270	940	315
FAHU-4	850 X 1300	2648	1250	35.0	27.0	14.0	69.4	32.6	7	12	3.31	34	EC	350	1.75	2130	1450	950	351
FAHU-5	850 X 1500	3178	1500	35.0	27.0	14.0	83.2	39.1	7	12	3.97	36	EC	350	2.20	2100	1650	950	389
FAHU-6	860 X 1690	3708	1750	35.0	27.0	14.0	97.1	45.7	7	12	4.63	20	EC	350	2.23	2230	1845	960	455
FAHU-7	980 X 1590	4237	2000	35.0	27.0	14.0	111.0	52.2	7	12	5.29	32	EC	350	2.72	2260	1745	1080	481
FAHU-8	1100 X 1660	5297	2500	35.0	27.0	14.0	138.8	65.2	7	12	6.61	22	EC	350	3.24	2400	1815	1200	557
FAHU-9	1160 X 1770	6356	3000	35.0	27.0	14.0	166.5	78.3	7	12	7.93	47	EC	350	3.91	2510	1925	1260	630
FAHU-10	1340 X 1780	7415	3500	35.0	27.0	14.0	194.2	91.3	7	12	9.25	24	EC	350	5.03	2820	1950	1440	801
FAHU-11	1460 X 1810	8474	4000	35.0	27.0	14.0	222.0	104.3	7	12	10.58	26	EC	350	5.5	2910	1980	1560	903
FAHU-12	1470 X 2010	9534	4500	35.0	27.0	14.0	249.8	117.4	7	12	11.90	30	EC	350	5.93	3080	2200	1570	1049
FAHU-13	1590 X 2000	10593	5000	35.0	27.0	14.0	277.5	130.4	7	12	13.22	32	EC	350	6.65	3080	2190	1690	1089
FAHU-14	1710 X 2150	12712	6000	35.0	27.0	14.0	333.0	156.5	7	12	15.86	40	EC	350	8.5	3130	2340	1810	1222
FAHU-15	1720 X 2450	14830	7000	35.0	27.0	14.0	388.5	182.6	7	12	18.51	42	EC	350	9.64	3260	2640	1820	1413
FAHU-16	1840 X 2550	16949	8000	35.0	27.0	14.0	444.0	208.7	7	12	21.15	38	EC	350	3 x 3.50	2520	2740	1940	1298
FAHU-17	2020 X 2520	19067	9000	35.0	27.0	14.0	499.5	234.8	7	12	23.80	48	EC	350	3 x 4.13	2500	2710	2120	1350
FAHU-18	2080 X 2710	21186	10000	35.0	27.0	14.0	555.0	260.8	7	12	26.44	47	EC	350	3 x 4.21	2600	2900	2180	1500
FAHU-19	2090 X 2910	23305	11000	35.0	27.0	14.0	610.5	286.9	7	12	29.08	34	EC	350	4 x 3.59	2460	3100	2190	1535
FAHU-20	2210 X 2960	25423	12000	35.0	27.0	14.0	666.0	313.0	7	12	31.73	38	EC	350	4 x 4.09	2460	3150	2310	1652
FAHU-21	2220 X 3180	27542	13000	35	27	14.0	721.5	339.1	7	12	34.37	45	EC	350	4 x 4.08	2540	3370	2320	1717

# Recirculating AHU - Chilled Water

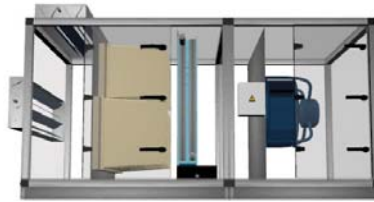

Unit Tag	Model	Supply Air Flow		Coil								Fan & Motor Supply			Dimension			Weight Kg	
				Air On Coil		Air Off Coil	Total Capacity	Sensible Capacity	Chilled Water Temperature		Water Flow	WPD	Fan Type	ESP	Power Input	Length	Width		Height
				DB °C	WB °C	DB °C	KW	KW	In °C	Out °C	l/s	KPA		Pa	Kw	mm	mm		mm
AHU-1	660 X 910	1059	500	27.0	19.0	14.0	9.6	8.0	7	12	0.46	22	EC	300	0.68	2070	1060	890	216
AHU-2	780 X 980	1589	750	27.0	19.0	14.0	14.4	12.0	7	12	0.69	22	EC	300	0.93	2120	1130	1010	248
AHU-3	840 X 1110	2119	1000	27.0	19.0	14.0	19.5	16.0	7	12	0.93	45	EC	300	1.16	2250	1260	1070	293
AHU-4	850 X 1310	2648	1250	27.0	19.0	14.0	24.3	19.9	7	12	1.16	34	EC	300	1.51	2250	1460	1080	328
AHU-5	850 X 1490	3178	1500	27.0	19.0	14.0	29.3	23.7	7	12	1.39	41	EC	300	1.97	2250	1640	1080	354
AHU-6	860 X 1690	3708	1750	27.0	19.0	14.0	34.2	27.7	7	12	1.63	41	EC	300	1.86	2390	1840	1090	421
AHU-7	980 X 1610	4237	2000	27.0	19.0	14.0	39.0	32.0	7	12	1.86	37	EC	300	2.29	2480	1760	1210	451
AHU-8	1100 X 1680	5297	2500	27.0	19.0	14.0	48.9	39.6	7	12	2.33	45	EC	300	2.62	2740	1830	1330	585
AHU-9	1160 X 1830	6356	3000	27.0	19.0	14.0	58.4	47.9	7	12	2.78	34	EC	300	3.74	2740	1980	1390	634
AHU-10	1340 X 1760	7415	3500	27.0	19.0	14.0	68.0	55.7	7	12	3.24	32	EC	300	4.11	2920	1910	1570	686
AHU-11	1460 X 1780	8474	4000	27.0	19.0	14.0	77.0	64.0	7	12	3.67	27	EC	300	4.74	3330	1930	1690	846
AHU-12	1470 X 1980	9534	4500	27.0	19.0	14.0	87.5	71.8	7	12	4.17	36	EC	300	5.00	3470	2130	1700	961
AHU-13	1590 X 1970	10593	5000	27.0	19.0	14.0	97.1	79.7	7	12	4.63	35	EC	300	5.94	3470	2125	1820	995
AHU-14	1710 X 2120	12712	6000	27.0	19.0	14.0	117	95.9	7	12	5.57	42	EC	300	7.45	3620	2275	1940	1129
AHU-15	1720 X 2420	14830	7000	27.0	19.0	14.0	134.4	111.5	7	12	6.4	26	EC	300	8.51	3710	2575	1950	1260
AHU-16	1840 X 2500	16949	8000	27.0	19.0	14.0	153.8	127.6	7	12	7.33	30	EC	300	3 x 3.14	3140	2655	2070	1187
AHU-17	2020 X 2530	19067	9000	27.0	19.0	14.0	173.9	142.6	7	12	8.28	34	EC	300	3 x 3.68	3170	2700	2250	1234
AHU-18	2080 X 2700	21186	10000	27.0	19.0	14.0	194.0	159.0	7	12	9.24	42	EC	300	3 x 3.80	3350	2870	2310	1360
AHU-19	2210 X 2790	23305	11000	27.0	19.0	14.0	214.2	175.6	7	12	10.2	46	EC	300	4 x 3.26	3270	2960	2440	1451
AHU-20	2210 X 3030	25423	12000	27.0	19.0	14.0	233.9	191.8	7	12	11.14	45	EC	300	4 x 3.68	3270	3200	2440	1608
AHU-21	2220 X 3230	27542	13000	27	19	14.0	254.3	206.0	7	12	12.11	50	EC	300	4 x 3.64	3410	3420	2450	1719


# Double Deck FAHU with Heat Wheel - DX Coil

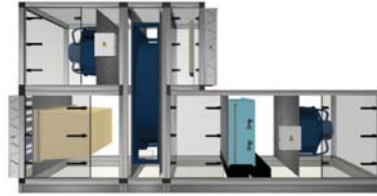

Unit Tag	Model	Supply Air Flow		Heat Recovery Wheel								Coil						Fan & Motor Supply			Fan & Motor Return			Dimension			Weight	
				Return Air Flow		Fresh Air On Heat Wheel		Fresh Air off Heat Wheel		Fresh Air off Heat Wheel		Air On Coil		Air Off Coil	Total Cap	Sensible Cap	Evap Temp	Ref- rigerant	Fan Type	Power Input	Fan Type	Power Input	Length	Width	Height			
				CFM	L/S	CFM	L/S	DB °C	WB °C	DB °C	WB °C	DB °C	WB °C	DB °C	WB °C	DB °C	KW	KW	°C		Pa	Kw	Pa	Kw	mm	mm		mm
FAHU-1	840 X 1110	2119	1000	1907	900	35	27	25	19.5	28.5	22.7	28.5	22.7	14.0	35.5	18.4	6	R-410a	EC	500	1.67	EC	500	1.17	3330	1260	1720	691
FAHU-2	850 X 1510	3178	1500	2860	1350	35	27	25	19.5	27.3	21.5	27.3	21.5	14.0	46.1	25.2	6	R-410a	EC	500	2.47	EC	500	1.89	3360	1660	1750	882
FAHU-3	920 X 1730	4237	2000	3813	1800	35	27	25	19.5	27.3	21.5	27.3	21.5	14.0	61.8	33.6	6	R-410a	EC	500	3.22	EC	500	2.28	3710	1880	1880	1092
FAHU-4	1040 X 1800	5297	2500	4767	2250	35	27	25	19.5	27.4	21.6	27.4	21.6	14.0	78.0	42.3	6	R-410a	EC	500	4.23	EC	500	2.81	3960	1950	2120	1227
FAHU-5	1110 X 1950	6356	3000	5720	2700	35	27	25	19.5	27.7	22.0	27.7	22.0	14.0	96.4	51.9	6	R-410a	EC	500	5.55	EC	500	3.46	4420	2100	2260	1592
FAHU-6	1170 X 2100	7415	3500	6674	3150	35	27	25	19.5	27.8	22.0	27.8	22.0	14.0	115.6	61.1	6	R-410a	EC	500	6.29	EC	500	3.95	4575	2250	2380	1709
FAHU-7	1290 X 2130	8474	4000	7627	3600	35	27	25	19.5	27.8	22.0	27.8	22.0	14.0	132.0	69.8	6	R-410a	EC	500	7.06	EC	500	4.90	4885	2280	2620	1977
FAHU-8	1350 X 2220	9534	4500	8580	4050	35	27	25	19.5	27.8	22.0	27.8	22.0	14.0	148.5	78.5	6	R-410a	EC	500	8.22	EC	500	5.48	4885	2370	2740	2073
FAHU-9	1410 X 2300	10593	5000	9534	4500	35	27	25	19.5	27.8	22.0	27.8	22.0	14.0	166.2	87.3	6	R-410a	EC	500	9.24	EC	500	5.96	5050	2450	2860	2252
FAHU-10	1540 X 2470	12712	6000	11440	5400	35	27	25	19.5	27.8	22.0	27.8	22.0	14.0	199.6	104.7	6	R-410a	EC	500	3 x 3.20	EC	500	8.40	4430	2620	3060	2255
FAHU-11	1660 X 2580	14830	7000	13347	6300	35	27	25	19.5	27.9	22.1	27.9	22.1	14.0	235.1	123.1	6	R-410a	EC	500	3 x 3.78	EC	500	8.89	4560	2730	3300	2492
FAHU-12	1780 X 2690	16949	8000	15254	7200	35	27	25	19.5	28.2	22.4	28.2	22.4	14.0	277.3	143.8	6	R-410a	EC	500	3 x 4.24	EC	500	9.44	4650	2840	3540	2670
FAHU-13	1910 X 2770	19067	9000	17161	8100	35	27	25	19.5	28.4	22.6	28.4	22.6	14.0	318.2	164.1	6	R-410a	EC	500	4 x 3.63	EC	500	3 x 3.45	3980	2895	3800	2624
FAHU-14	1970 X 2940	21186	10000	17161	8100	35	27	25	19.5	28.8	22.8	28.8	22.8	14.0	361.8	187.4	6	R-410a	EC	500	4x4.13	EC	500	3x3.42	4020	3065	3740	2936




# FAHU without Recovery - DX Coil

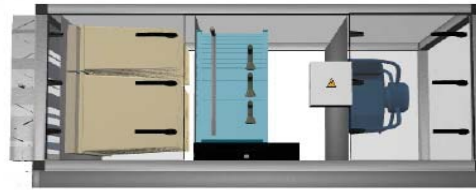

Unit Tag	Model	Supply Air Flow		Coil						Fan & Motor Supply			Dimension			Weight Kg	
				Air On Coil		Air Off Coil	Total Capacity	Sensible Capacity	Evaporating Temp	Refrigerant	Fan Type	ESP Pa	Power Input Kw	Length mm	Width mm		Height mm
		CFM	L/S	DB °C	WB °C	DB °C	KW	KW	°C								
AHU-1	660 X 920	1059	500	35.0	27.0	14.0	28.1	13.4	6	R-410a	EC	350	0.68	2000	1070	760	214
AHU-2	780 X 980	1589	750	35.0	27.0	14.0	42.2	20.1	6	R-410a	EC	350	0.96	2000	1130	880	238
AHU-3	840 X 1120	2119	1000	35.0	27.0	14.0	56.4	26.8	6	R-410a	EC	350	1.18	2180	1270	940	289
AHU-4	850 X 1300	2648	1250	35.0	27.0	14.0	70.4	33.5	6	R-410a	EC	350	1.55	2180	1450	950	319
AHU-5	850 X 1480	3178	1500	35.0	27.0	14.0	84.6	40.2	6	R-410a	EC	350	2.00	2180	1630	950	351
AHU-6	860 X 1670	3708	1750	35.0	27.0	14.0	98.6	46.9	6	R-410a	EC	350	1.90	2320	1820	960	411
AHU-7	980 X 1670	4237	2000	35.0	27.0	14.0	112.8	53.6	6	R-410a	EC	350	2.39	2385	1820	1080	447
AHU-8	1100 X 1730	5297	2500	35.0	27.0	14.0	140.8	67.0	6	R-410a	EC	350	2.69	2555	1880	1200	522
AHU-9	1160 X 1850	6356	3000	35.0	27.0	14.0	168.9	80.4	6	R-410a	EC	350	3.78	2580	2000	1260	573
AHU-10	1340 X 1810	7415	3500	35.0	27.0	14.0	197.1	93.8	6	R-410a	EC	350	4.16	2660	1960	1440	621
AHU-11	1460 X 1840	8474	4000	35.0	27.0	14.0	225.3	107.2	6	R-410a	EC	350	4.88	3060	1990	1560	828
AHU-12	1470 X 2010	9534	4500	35.0	27.0	14.0	254.2	120.6	6	R-410a	EC	350	5.50	3060	2160	1570	892
AHU-13	1590 X 2040	10593	5000	35.0	27.0	14.0	282.5	134.0	6	R-410a	EC	350	5.86	3200	2190	1690	990
AHU-14	1710 X 2190	12712	6000	35.0	27.0	14.0	338.9	160.7	6	R-410a	EC	350	7.62	3250	2340	1810	1139
AHU-15	1720 X 2480	14830	7000	35.0	27.0	14.0	395.2	187.5	6	R-410a	EC	350	9.41	3250	2630	1820	1220
AHU-16	1840 X 2570	16949	8000	35.0	27.0	14.0	451.5	214.3	6	R-410a	EC	350	3 x 2.93	2670	2695	1940	1102
AHU-17	2020 X 2590	19067	9000	35.0	27.0	14.0	507.9	241.1	6	R-410a	EC	350	3 x 3.68	2670	2715	2120	1202
AHU-18	2090 X 2730	21186	10000	35.0	27.0	14.0	564.2	267.9	6	R-410a	EC	350	3 x 3.85	2660	2855	2190	1203
AHU-19	2090 X 2960	23305	11000	35.0	27.0	14.0	620.3	294.7	6	R-410a	EC	350	3 x 4.42	2660	3085	2190	1265
AHU-20	2210 X 3050	25423	12000	35.0	27.0	14.0	676.7	321.5	6	R-410a	EC	350	4 x 3.75	2670	3175	2310	1470
AHU-21	2220 X 3260	27542	13000	35	27	14.0	732.3	348.3	6	R-410a	EC	350	4 x 3.72	2750	3385	2320	1574

# Recirculating AHU - DX Coil

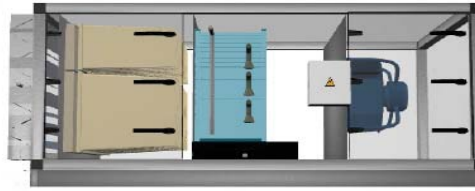

Unit Tag	Model	Supply Air Flow		Coil						Fan & Motor Supply			Dimension			Weight Kg	
				Air On Coil		Air Off Coil	Total Capacity	Sensible Capacity	Evaporating Temperature	Refrigerant	Fan Type	ESP	Power Input	Length	Width		Height
		CFM	L/S	DB °C	WB °C	DB °C	KW	KW	°C		Pa	Kw	mm	mm	mm		
AHU-1	660 X 920	1059	500	27.0	19.0	14.0	11.2	8.2	6	R-410a	EC	300	0.66	2160	1070	890	217
AHU-2	780 X 980	1589	750	27.0	19.0	14.0	16.7	12.2	6	R-410a	EC	300	0.89	2110	1130	1010	234
AHU-3	840 X 1070	2119	1000	27.0	19.0	14.0	22.0	16.3	6	R-410a	EC	300	1.13	2240	1220	1070	271
AHU-4	850 X 1250	2648	1250	27.0	19.0	14.0	28.1	20.4	6	R-410a	EC	300	1.48	2240	1400	1080	298
AHU-5	850 X 1430	3178	1500	27.0	19.0	14.0	33.6	24.5	6	R-410a	EC	300	1.92	2240	1580	1080	325
AHU-6	860 X 1620	3708	1750	27.0	19.0	14.0	38.9	28.6	6	R-410a	EC	300	1.80	2380	1770	1090	384
AHU-7	980 X 1570	4237	2000	27.0	19.0	14.0	44.8	32.7	6	R-410a	EC	300	2.19	2470	1720	1210	413
AHU-8	1100 X 1680	5297	2500	27.0	19.0	14.0	55.7	40.8	6	R-410a	EC	300	2.49	2880	1830	1330	561
AHU-9	1160 X 1800	6356	3000	27.0	19.0	14.0	68.2	49.0	6	R-410a	EC	300	3.59	2880	1950	1390	607
AHU-10	1340 X 1760	7415	3500	27.0	19.0	14.0	79.7	57.1	6	R-410a	EC	300	3.93	3060	1910	1570	664
AHU-11	1460 X 1780	8474	4000	27.0	19.0	14.0	91.0	65.3	6	R-410a	EC	300	4.49	3470	1930	1690	806
AHU-12	1470 X 1960	9534	4500	27.0	19.0	14.0	102.0	73.5	6	R-410a	EC	300	5.18	3470	2110	1700	856
AHU-13	1590 X 2040	10593	5000	27.0	19.0	14.0	113.3	81.6	6	R-410a	EC	300	5.36	3685	2190	1820	971
AHU-14	1710 X 2190	12712	6000	27.0	19.0	14.0	135.4	98.0	6	R-410a	EC	300	6.27	4005	2340	1940	1174
AHU-15	1720 X 2480	14830	7000	27.0	19.0	14.0	156.5	114.3	6	R-410a	EC	300	8.88	3835	2630	1950	1202
AHU-16	1840 X 2570	16949	8000	27.0	19.0	14.0	182.9	130.6	6	R-410a	EC	300	3 x 2.69	3280	2690	2070	1085
AHU-17	2020 X 2590	19067	9000	27.0	19.0	14.0	205.7	146.9	6	R-410a	EC	300	3 x 3.48	3380	2710	2250	1212
AHU-18	2090 X 2730	21186	10000	27.0	19.0	14.0	228.5	163.3	6	R-410a	EC	300	3 x 3.59	3560	2850	2320	1327
AHU-19	2210 X 2820	23305	11000	27.0	19.0	14.0	251.2	179.6	6	R-410a	EC	300	3 x 4.16	3560	2940	2440	1385
AHU-20	2210 X 3030	25423	12000	27.0	19.0	14.0	273.6	195.9	6	R-410a	EC	300	4 x 3.55	3480	3150	2440	1509
AHU-21	2220 X 3260	27542	13000	27	19	14.0	296.0	212.2	6	R-410a	EC	300	4 x 3.47	3560	3380	2450	1581